

# FingerFlex TF1700

Best Choice For Outdoor Access Control



TF1700 is one of the world's smallest Ethernet connection-based fingerprint terminals, used for access control and time attendance features, with IP65 waterproof housing.

With its IP65 rated rugged waterproof and dustproof structure, TF1700 offers extra durability in harsh conditions such as outdoor environments. It is specially designed for standalone applications such as house, office, shop, garage, factory and others.

The 2013 version of TF1700 is equipped with a sensor cover to protect the optical reader and updated with new firmware that supports ZKAccess3.5 management software, which has versatile features and powerful functions.

## Features

### Rugged Structure for Outdoor Installation and Extra Durability

- IP65 rated waterproof and dustproof structure

### Slim and Elegant Design

- One of the world's smallest fingerprint terminals
- Sleek and slim desing for narrow spaces

### Fast and Accurate Fingerprint Algorithm

- 1 touch a-second user recognition
- Store 3,000 fingerprint templates, 30,000 cards and 100,000 transactions

### Easy Installation and Connectivity

- Wiegand input and output
- Network interface by TCP/IP or RS485

### Full Access Control Features

- Anti-passback
- Access control interface for 3<sup>rd</sup> party electric lock, door sensor exit button, alarm and doorbell

### Easy Operation and Management



- Work without computer
- OLED, buzzer, 3x5 keypads
- Built-in keypad and RF card reader for multi-modal authentication (Fingerprint/IPN/Card)

# Specifications

<b>Fingerprint Sensor</b>	Infrared detection fingerprint sensor
<b>Algorithm Version</b>	ZK Finger 10.0
<b>Communication</b>	TCP/IP, RS485, USB Host
<b>Fingerprint Capacity</b>	3,000 Fingerprints(8,000 Optional)
<b>Card Capacity</b>	30,000 Cards
<b>Log Capacity</b>	100,000 Transactions
<b>RF Card</b>	EM(standard)/Mifare(optional)
<b>Authentication</b>	Finger/PIN/Card
<b>Wiegand Signal</b>	Wiegand input&output
<b>Ingress Protection Rate</b>	IP65
<b>Display</b>	128 x 64 OLED
<b>Keypad</b>	3 x 5 keypads & doorbell
<b>Sound and Interface</b>	Buzzer and multi-color LED
<b>Operating Voltage</b>	12VDC 3A
<b>Operating Temperature</b>	-10 °C~50 °C (14°F ~ 122°F)
<b>Dimension</b>	62.5mmx185mmx41.5mm (WxHxD)

## Configuration

## Dimensions (mm)

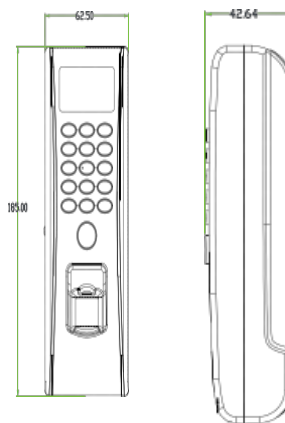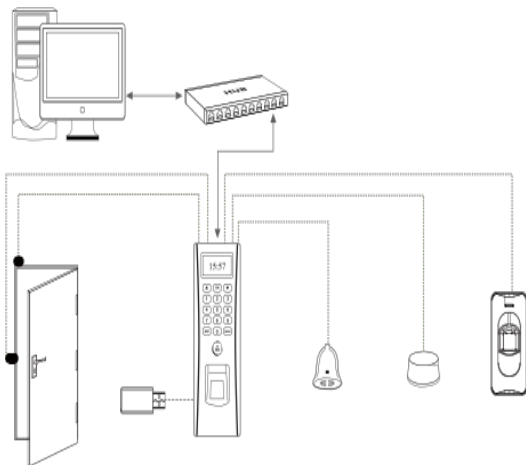

P2 Digital Holdings Sdn Bhd  
A-G-05 SME Technopreneur Centre 2270  
Jalan Usahawan 2, Cyber 6,  
63000 Cyberjaya, Selangor, MALAYSIA

Phone: (+60)3 8688 5750  
Fax: (+60)3 8688 5749  
E-mail: info@p2digital.com

© Copyright 2015. P2 Digital Holdings Sdn Bhd. FingerFlex is a registered trademark of P2 Digital Holdings or a related company. All other product and company names mentioned are used for identification purposes only and may be the trademarks of their respective owners. All specifications are subject to change without notice. All rights reserved.



FINGERFLEX

FLEXICILITY

TIMEKEEPER